


Alignment Editor Components

Here is the default layout of the editor:

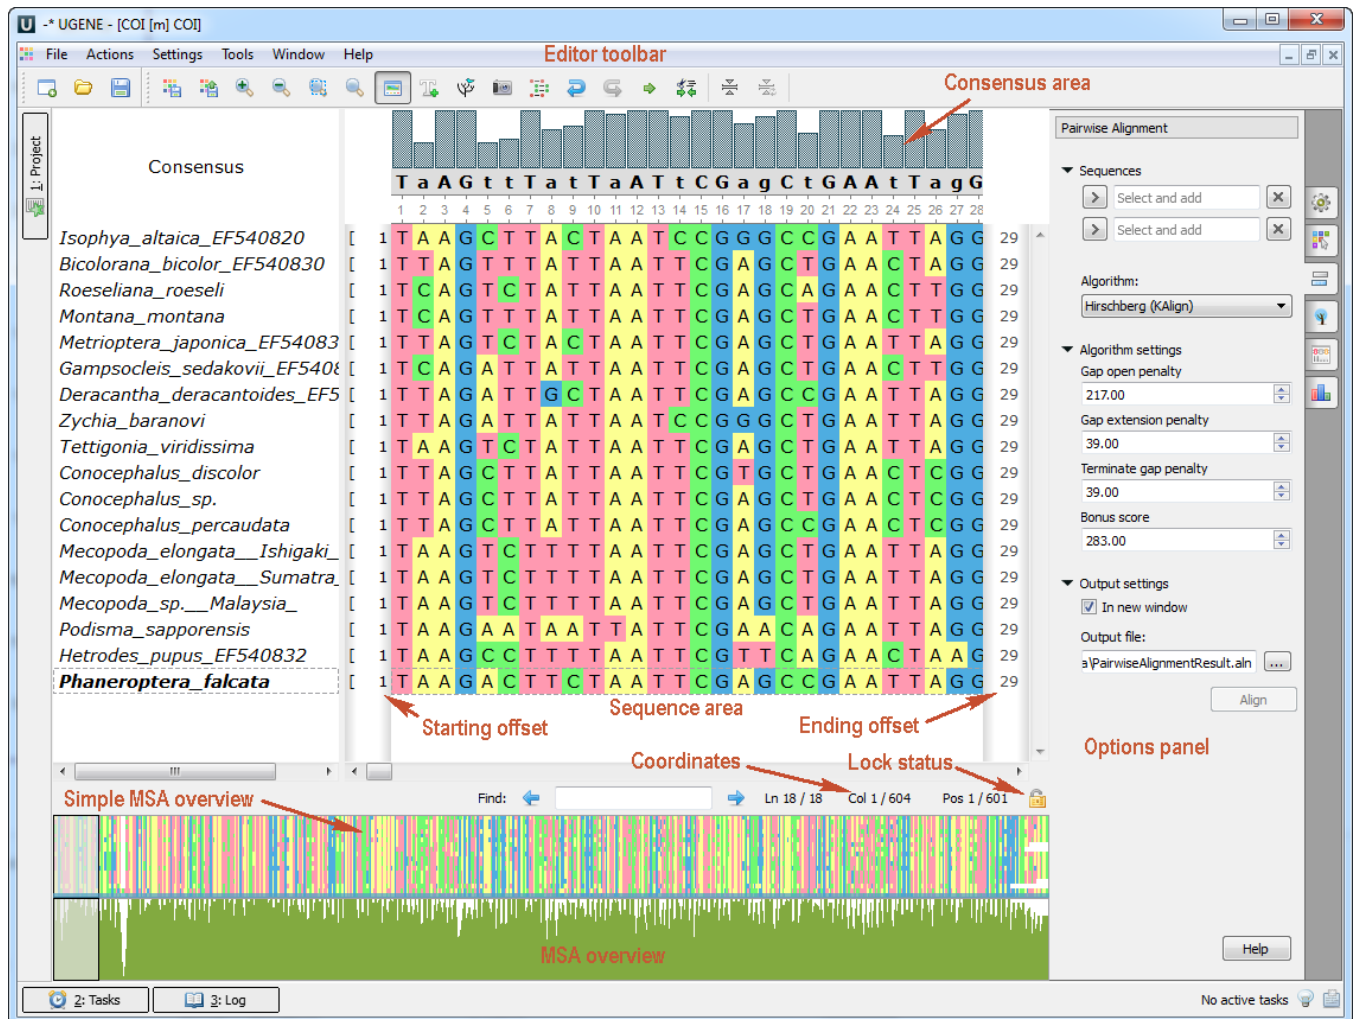

The *Alignment Editor* components:

For example, let's assume that the coordinate of the first visible base of the row is N , but the row contains K gaps before the position N . The starting offset value will be $N-K$. The same rule is true for the ending offset.

You can turn off the *Sequence offsets* by unchecking the *Actions View Show offsets* main menu item or *View Show offsets* context menu item.