


Fetching Sequences from Remote Database

Each result annotation found with the [remote BLAST](#) in UGENE has a qualifier that specifies ID of the sequence. The prompt way to fetch sequences of several annotations is the following: select the annotations in the [Annotations Editor](#), open the context menu, and choose the *Fetch sequences from remote database->Fetch sequences by 'id' from 'blast result'* item. The following dialog will appear:

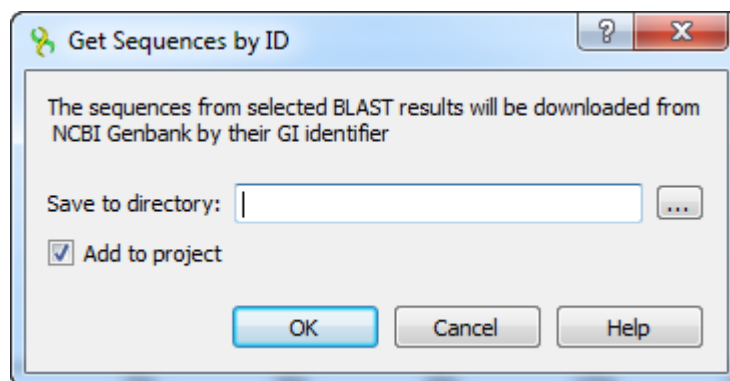

Select an output path in the dialog and click the *OK* button.